
U01-4-407
UNIVERSAL HD THROTTLE CABLE KIT. THREADED FIT 6mm CONDUIT, 1.25m

This high-quality universal Harley Davidson throttle cable kit includes **1.25m** of standard black conduit (6mmø), **1.65m** of inner wire (1.2mmø) and selection of fittings. One end of the inner wire is fitted with a ball nipple (4.3mmø). The other end will need to be cut to length and the required nipple tightened in place. The ferrules are crimped on the conduit at one end. The ferrule bends can be bonded in place during the assembly with glue or use a centre punch to make a small indentation in their side. The fittings can be adapted for a range of models.

Description	Qty
Conduit 6mm O.D.	1.25m
Inner cable 1.2mm wire rope with a fixed ball nipple on one end of 4.3mm O.D.	1.65m
Slotted Barrel nipple ø6mm x 6.5mm	2
Solderless Barrel nipple ø6mm x 10mm	2
90 degrees threaded fit ferrule bend with 1/4-inch x 20 UNC thread	1
90 degrees threaded fit ferrule bend with 5/16-inch x 18 UNC thread	1
75 degrees threaded fit ferrule bend with 1/4-inch x 20 UNC thread	1
75 degrees threaded fit ferrule bend with 5/16-inch x 18 UNC thread	
Neoprene rubber boots	2
Small spring ø4.5mm x 9mm	1
Ferrule ø 5.5mm nose crimped onto one end of the conduit.	1
Ferrule ø 4.8mm nose crimped onto one end of the conduit.	1
Instant Glue	1

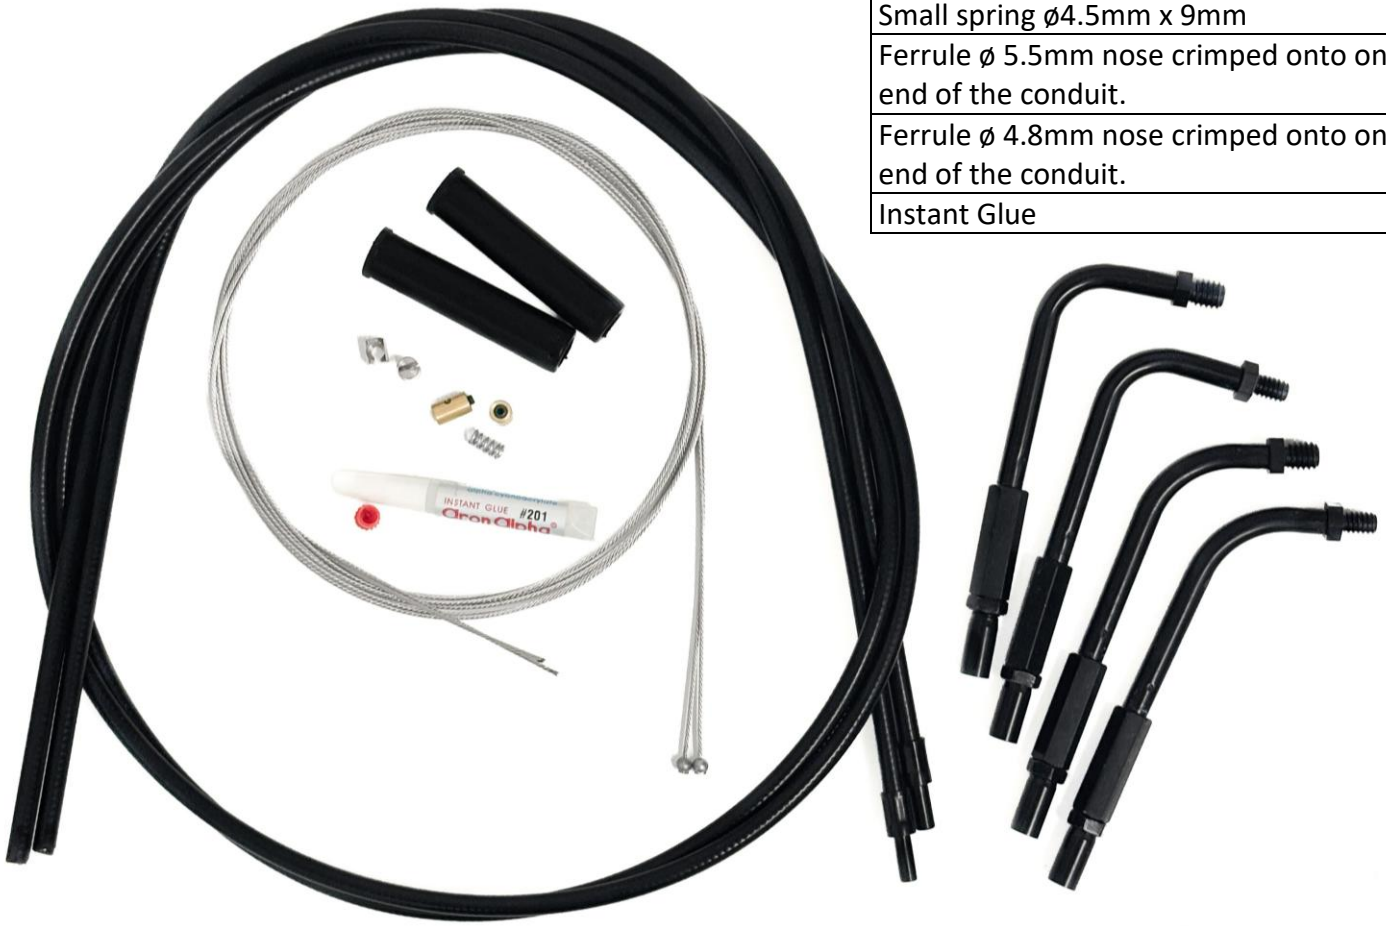

Venhill Engineering Ltd
21 Ranmore Road
Dorking
Surrey
RH4 1HE

Sales: +44 (0) 1306 885111 Fax: +44 (0) 1306 740535 Web: www.venhill.co.uk Email: info@venhill.co.uk