


U01-4-100  
 UNIVERSAL THROTTLE CABLE KIT  
 6mm CONDUIT, 1.35m

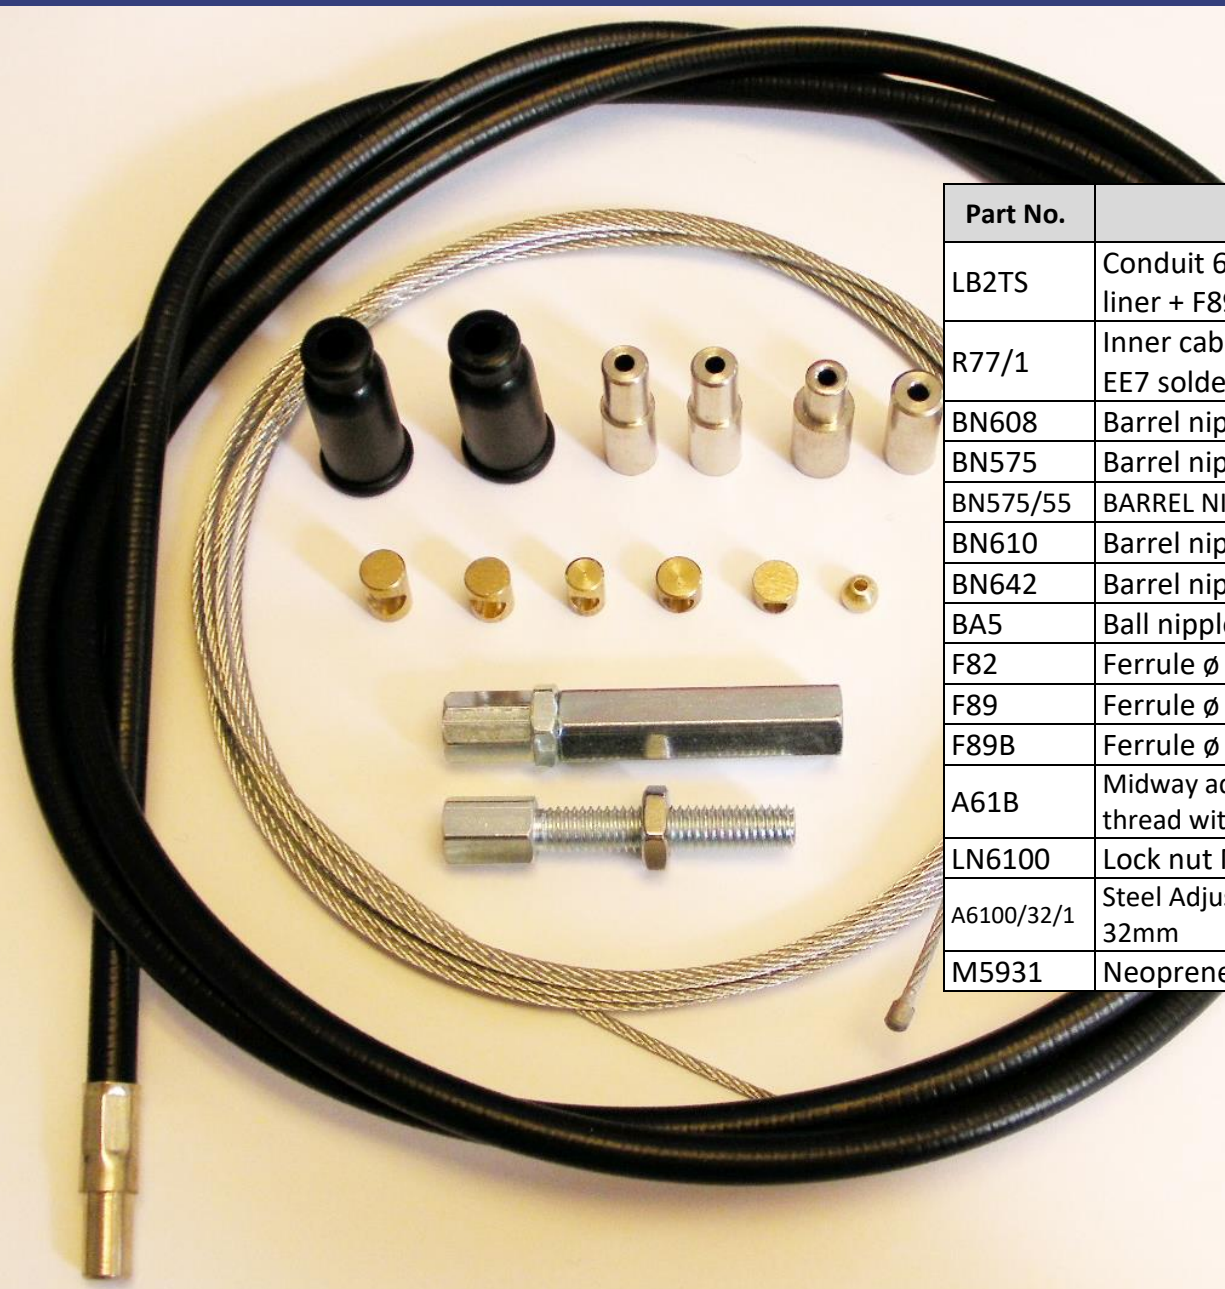

Part No.	Description	Qty
LB2TS	Conduit 6mmO.D. with Teflon liner + F89 crimped to one end	1.35m
R77/1	Inner cable 7x7 rope $\varnothing$ 1.5mm + EE7 soldered to one end	1.60m
BN608	Barrel nipple $\varnothing$ 6mm x 8mm	1
BN575	Barrel nipple $\varnothing$ 5mm x 7.5mm	1
BN575/55	BARREL NIPPLE 6mm O.D. x 5mm	1
BN610	Barrel nipple $\varnothing$ 6mm x 10mm	1
BN642	Barrel nipple $\varnothing$ 6mm x 4.2mm	1
BA5	Ball nipple $\varnothing$ 5mm	1
F82	Ferrule $\varnothing$ 5.5mm nose	1
F89	Ferrule $\varnothing$ 6.5mm nose	2
F89B	Ferrule $\varnothing$ 7mm O.D.	1
A61B	Midway adjuster – 32mm long thread with stem and lock nut	1
LN6100	Lock nut M6 x 1.0 stainless	1
A6100/32/1	Steel Adjuster Screw M6 x 1.0 X 32mm	1
M5931	Neoprene boot 7mm I.D.	2

This high quality universal throttle cable kit includes **1.35m** of standard black conduit (6mm $\varnothing$ ) with Teflon liner, **1.60m** of inner wire and selection of fittings. One end of the inner wire is fitted with a carburetor nipple (EE7 3mm $\varnothing$  x 3mm). The other end will need to be cut to length and the required nipple soldered in place. The ferrules and adjusters are a snug fit on the conduit. They can be bonded in place during the assembly with glue or use a centre punch to make a small indentation in their side. The fittings can be adapted for a range of models. Basic soldering kit is needed to solder the nipples in place.

Venhill Engineering Ltd  
 21 Ranmore Road  
 Dorking  
 Surrey  
 RH4 1HE