


U01-4-101
 UNIVERSAL THROTTLE CABLE KIT
 5mm CONDUIT, 1.35m

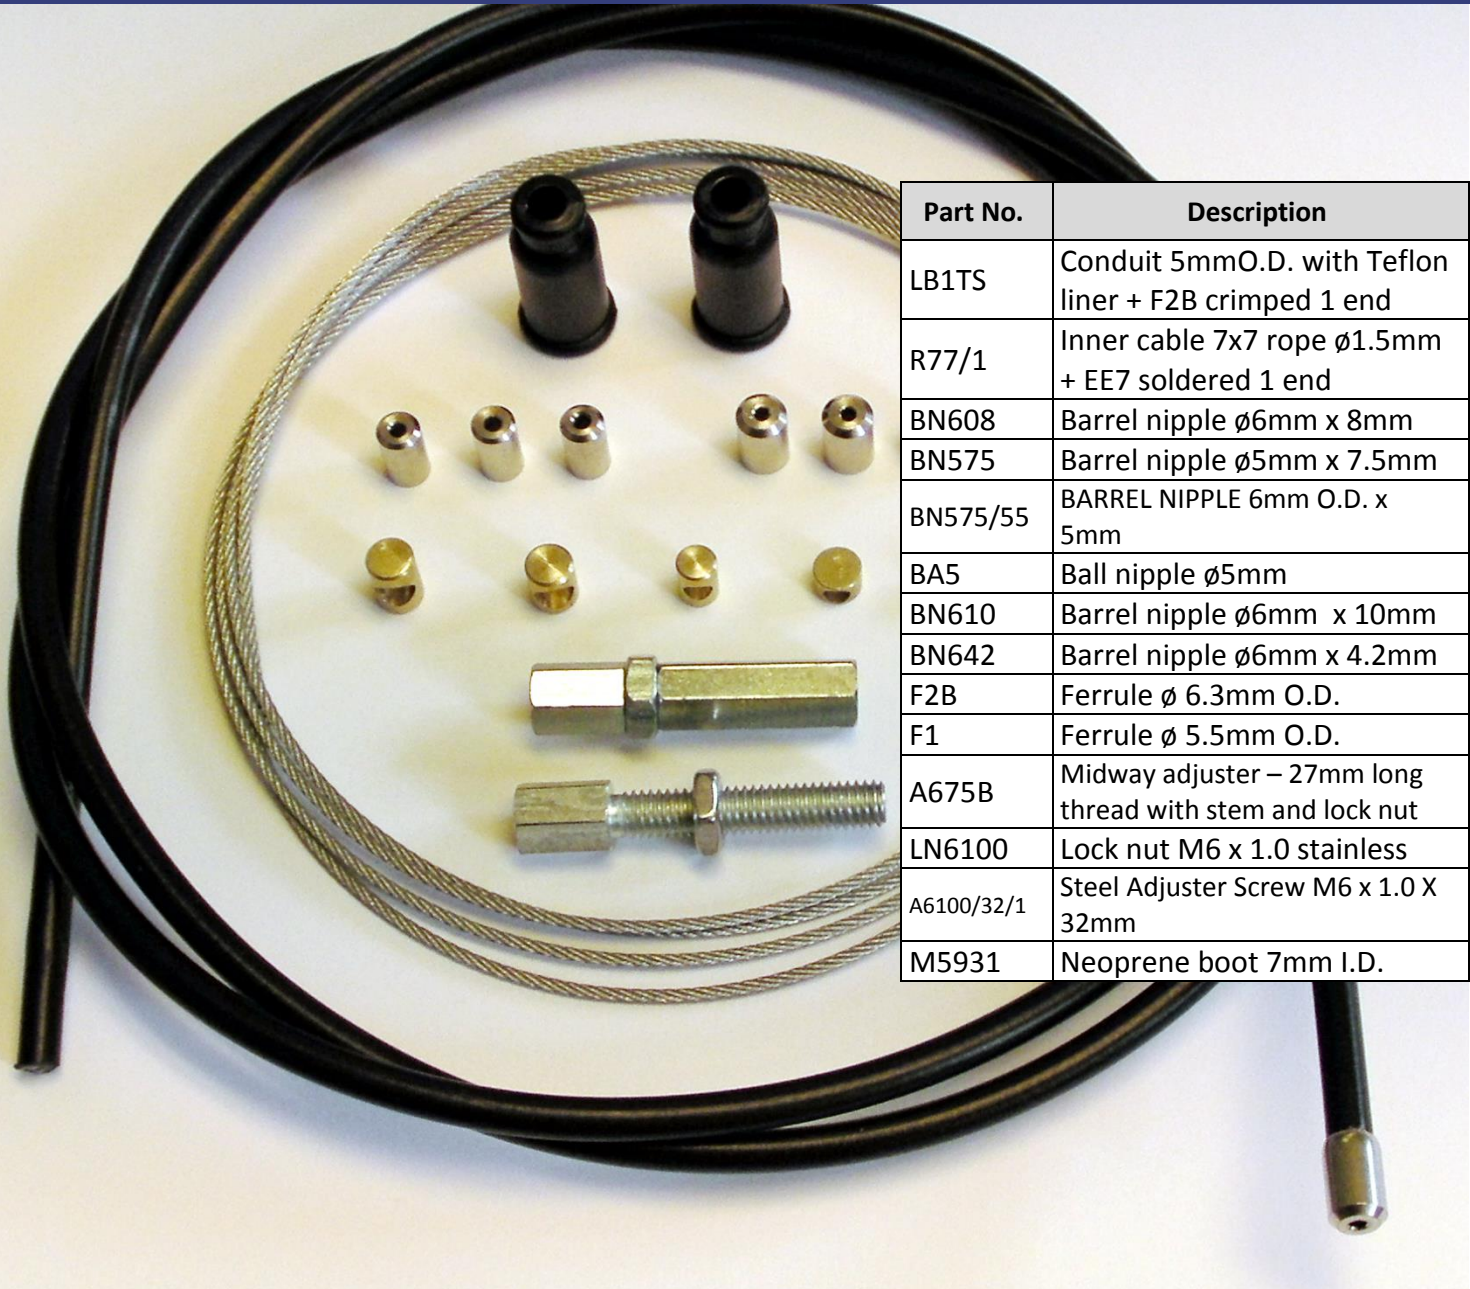

Part No.	Description	Qty
LB1TS	Conduit 5mmO.D. with Teflon liner + F2B crimped 1 end	1.35m
R77/1	Inner cable 7x7 rope ϕ 1.5mm + EE7 soldered 1 end	1.60m
BN608	Barrel nipple ϕ 6mm x 8mm	1
BN575	Barrel nipple ϕ 5mm x 7.5mm	1
BN575/55	BARREL NIPPLE 6mm O.D. x 5mm	1
BA5	Ball nipple ϕ 5mm	1
BN610	Barrel nipple ϕ 6mm x 10mm	1
BN642	Barrel nipple ϕ 6mm x 4.2mm	1
F2B	Ferrule ϕ 6.3mm O.D.	3
F1	Ferrule ϕ 5.5mm O.D.	3
A675B	Midway adjuster – 27mm long thread with stem and lock nut	1
LN6100	Lock nut M6 x 1.0 stainless	1
A6100/32/1	Steel Adjuster Screw M6 x 1.0 X 32mm	1
M5931	Neoprene boot 7mm I.D.	2

This high quality universal throttle cable kit includes **1.35m** of standard black conduit (5mm ϕ) with Teflon liner, **1.60m** of inner wire and selection of fittings. One end of the inner wire is fitted with a carburetor nipple (EE7 3mm ϕ x 3mm). The other end will need to be cut to length and the required nipple soldered in place. The ferrules and adjusters are a snug fit on the conduit. They can be bonded in place during the assembly with glue or use a centre punch to make a small indentation in their side. The fittings can be adapted for a range of models. Basic soldering kit is needed to solder the nipples in place.

Venhill Engineering Ltd
 21 Ranmore Road
 Dorking
 Surrey
 RH4 1HE